




Bofloor
durable quality

BoClip BF10

Heavy duty loose lay interlocking tiles.

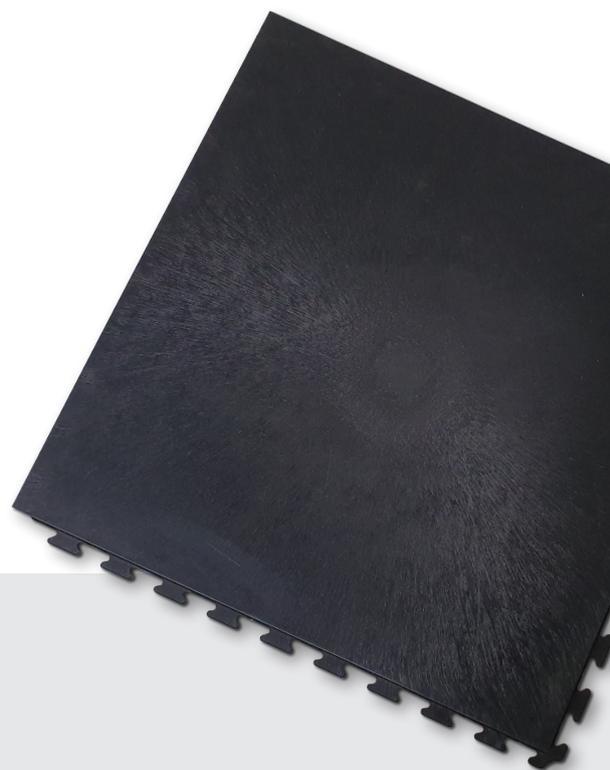

BoClip BF10 is a synthetic tile system consisting of interlocking tiles for loose lay installation with a neutral flow line (fanning from the centre) (GL) surface structure. The tiles have an invisible click connection (hidden joint).

This all-round solution solves all your flooring problems. The tiles cover cracks and imperfections and are therefore perfect for damaged, damp or soiled subfloors. The perfect solution for all locations that are unsuitable for other flooring systems or where the floors are subject to heavy loads. The click connection is made in such a way that the tiles can also be staggered with the advantage of even more stability and less cutting waste.

Loose lay installation

These 10 mm tiles are for loose lay installation. In some cases, such as locations with lots of direct sunlight, heavy forklift traffic or impermeability requirements in catering kitchens, it is recommended to glue the tiles to the subfloor with 2K-PU glue. Another method to ensure that the tiles stay in place under extremely heavy loads is to use a fixative. The tiles are properly fixed to the floor, yet can easily be picked up.

Properties and benefits

- Suitable for loose lay installation on top of the existing subfloor
- Can be laid randomly
- No preparation or building work required
- Ready to use and to be placed under load
- No or minimal business interruption
- Suitable for extremely heavy loads such as fork lift trucks or stackers
- Easy to make watertight (without the need for special tools)
- Easy to pick up and refit
- Excellent sound insulation and ergonomic
- Non-slip (R12)
- Easy to clean and maintain
- A perfect alternative for ceramic tiles, coatings or concrete paint

Applications

- Industry
- Warehouses
- Workshops
- Logistics centres
- Chemical industry
- Aircraft hangars
- Factories
- Printing businesses
- Machine factories
- Petrochemical industry
- Metal workshops
- Manufacturing companies

Watertight

These tiles have a unique click connection and are virtually watertight. 100% impermeability can be achieved without the use of special tools. Simply apply MS polymer kit or a cold-weld product to the sealing lip of the click connection to make the floor watertight.


Technical data

Connection	Click connection (hidden joint)
Dimensions	500 x 500 mm
Thickness	10 mm
Weight	3,2 kg per tile
Material	Recycling PVC (manufactured conform REACH and CE standards)
Surface structure	GL: Flow line
Toughness	92 Shore A
Non-slip	R12
Fire performance	B1fl-S1 Does not readily catch fire
Underside	Smooth
Suitable for underfloor heating	Yes
Thermally weldable	Yes with 5 mm welding rod
Accessories	Transition profile, skirting, sanitary skirting
Plasticizer exudation	Rubber tyres or caps can cause brown staining to coloured tiles, as can herbs or juices from food stuffs


Colors



black



graphite



grey

More information

If you would like more information about our company or our products, please contact us at 0031-455322277 or send us an email: info@bofloor.biz



a Havikweg 17
6374 AZ Landgraaf (NL)

Industrial area Abdissenbosch
Parkstad 3381

t 0031-455322277
e info@bofloor.biz

www.bofloorindustrialflooring.com